


2" OmegaPost

High Speed High Performance Delineator

Posts are available in 28", 36", and 42" heights and 2-3/8" (60mm) diameter.


Available in white, yellow, orange and black.

42" model shown with open top. Also available in 3" (76mm) wide 14" long squeeze delineator style or color matched welded cap.

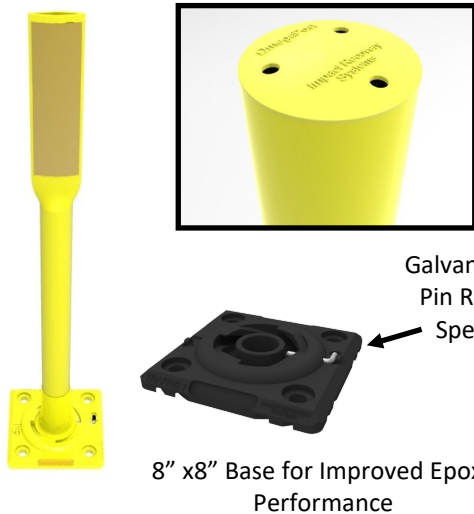

Galvanized Keeper Pin Requires No Special Tools

8" x 8" Base for Improved Epoxy Performance

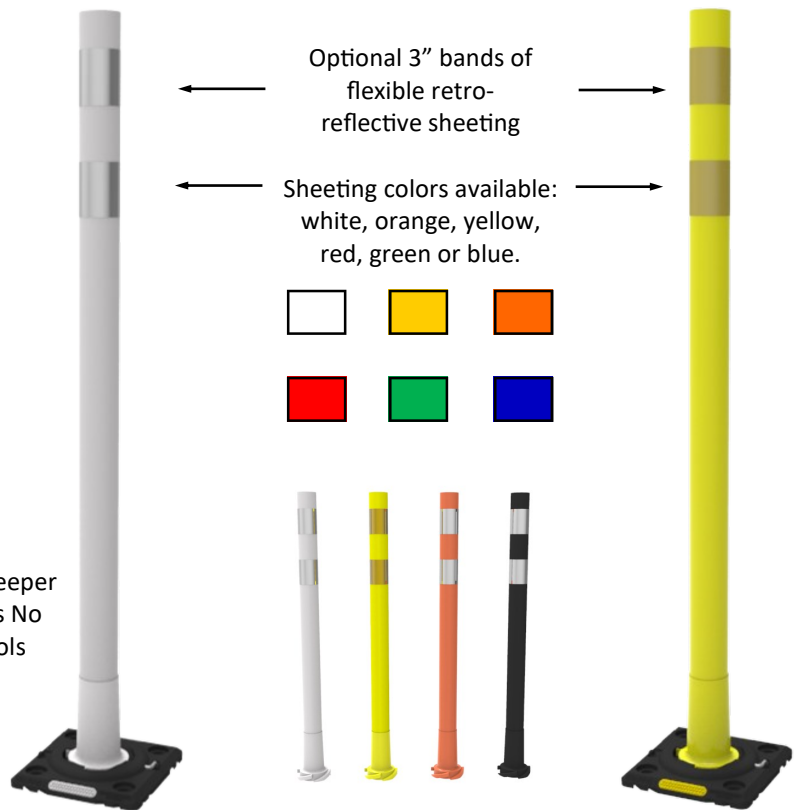

BASE OPTIONS


This product can be used with:
Quarter Turn Surface Mount Base in black (standard) or white/yellow (optional).

Tuff Curb XLP and One Base Portables now available in Quarter Turn Socket!



REFLECTOR OPTIONS

Optional reflectors may be added to bases in the white, yellow or red.



SPECIFICATIONS

- Post is constructed of flexible plastic that is resistant to ultraviolet light, ozone, and hydrocarbons.
- Abrasion Resistant Type V Reflective Sheeting
- Meets MUTCD Specifications
- Category 1 Self Certified Device
- NTPEP Tested to 200 hits at 70 mph
- 1.5 Pounds Total Weight

RECOMMENDED USES

- High Speed Managed /HOV Lanes
- Bike Lanes
- Urban Turn Restrictions
- Corrosive Environments
- Island Markers
- Gore Areas

IMPACT recovery
SYSTEMS™

4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@impactrecovery.com
www.impactrecovery.com

